




MODEL CMM0900N

MULTI-STANDARD EIA/CCIR 9" BLACK & WHITE VIDEO MONITOR

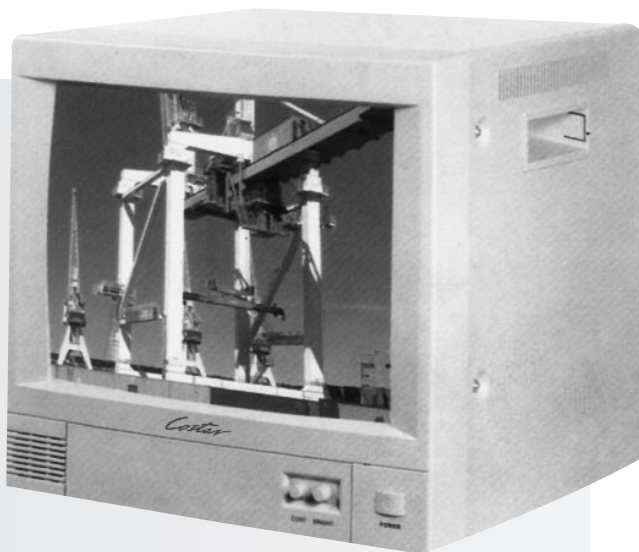

Easily adaptable for both EIA or CCIR applications, the CMM0900N 9" 800-line resolution black and white monitor features a universal switching power supply from 100V to 240V AC. The compact size allows it to be mounted in a 19" rack. The easy to use front panel, video loop through, and auto termination features provide flexibility and optimum control. This unit comes standard with an IEC power cord.

FEATURES

- Multi-standard EIA/CCIR, switchable
- Universal switching power supply.
100V to 240V AC
- 90° deflection-angle picture tube
- > 800 lines of resolution
- Video loop through
- Auto termination
- Rack mountable metal cabinet
- Easy to use front panel rotary knobs
- Low power consumption
- UL listed, FCC approved
- Optional 19" rack mount (MA0900GR)
- 2-year limited warranty, 90-day limited warranty on CRT

Our people make a difference.

Choice. Value. Service.

1420 Halsey Way, Suite 140 • Carrollton, TX 75007
Tel: 972-446-8844 • Fax: 972-446-8866 • 1-888-694-STAR (7827) www.costarvideo.com

MODEL CMM0900N

ELECTRICAL

Horizontal Resolution	800 TV lines (average)
Scan System	EIA/CCIR switchable
Scanning Frequency	
Horizontal	15.75 KHz for EIA/15.625 KHz for CCIR
Vertical	60Hz for EIA/50 Hz for CCIR
Video In/Out	EIA/CCIR composite video: 1.0 Vp-p 75W/ Ω /Hi-Z auto terminating
Power Source	100 to 240V AC 60/50 Hz (universal power)
Power Cord	Detachable, IEC
Power Consumption	18W

MECHANICAL

Picture Tube	
CRT Tube	9" diagonal
Deflection	90° angle
Rear Connectors	
Video In/Out	BNC connector x 2, auto termination
EIA/CCIR	Switch
Power Cord	Detachable, IEC
Front Controls	
H-Hold	Rotary knob
V-Hold	Rotary knob
Brightness	Rotary knob
Contrast	Rotary knob
Power	Push button On/Off switch (LED green)
Dimensions	8.6W x 9.7H x 9.1D in (220W x 248H x 234D mm)
Weight	9.5lbs (4.3 Kg)

ENVIRONMENTAL SPECIFICATIONS

Ambient Temperature	32°F - 104°F (0°C - 40°C)
Humidity	10% - 90% non-condensing

RECOMMENDED CAMERAS

CCM3400N	1/3" CCD, 400 TVL, .05 lux @ F1.2, B&W camera with BLC, 12V DC/24V AC switchable power and C/CS/back-focus ring
CCM3600N	1/3" CCD, 570 TVL, .06 lux @ F1.2, B&W camera with BLC, 12V DC/24V AC switchable power and C/CS/back-focus ring

RECOMMENDED VIDEO RECORDERS

CR611	8-hour event recorder
CR3030	30-hour virtual real-time/30-hour high-density recorder with time/date search
CR3960	30-hour virtual real-time/960-hour high-density recorder with time/date search

OPTIONS

CA0900G	19" optional single mount for 9" B&W Monitor
---------	--

Design and specifications subject to change without notice.
Conversion: 1" = 25.4mm
Measurement conversions are approximate



Distributed by

1420 Halsey Way, Suite 140 • Carrollton, TX 75007
Tel: 972-446-8844 • Fax: 972-446-8866 • 1-888-694-STAR (7827)
www.costarvideo.com